



goslyn™ MODEL GOS80 25 GPM Grease Removal Device



Model: GOS80
Capacity: 25 Gallons / Minute

GOS80 – Standard Features:

- Heavy duty 2.5 mm, 304 Stainless Steel exterior construction
- Neoprene seals on base of unit
- Fixed rate flow restrictor included (25 gal. / minute)
- Immersion heater (UL listed) to keep effluent warm during idle periods
- Self-closing drain valve included
- Strainer basket to prevent solid debris from entering the drain pipes
- Easy access hinged lid compartments
- Two oil collection cassettes included
- No moving parts
- Manufactured to ASME A112.14.3 and ASME A112.14.4 standards
- Five Year Limited Warranty



Short Form Specification

Shall be a Goslyn Model: GOS80 grease removal device / immiscible liquid separator which continuously operates under hydro static pressure with no moving parts. Is made of 2.5 mm, 304 stainless steel and comes standard with an immersion heater and two (2) oil recovery cassettes. It has a capacity of 25 gallons per minute and is UL, NSF, IAPMO / UPC approved.

For Sales/Service please contact: FogBusters, Inc. Bradley Mart 415-425-5590;

bradley@fogbustersinc.com; www.fogbustersinc.com



“The easiest & most effective GRD to operate & maintain!”



Goslyn LP
1904 University Business Dr
Suite 310
McKinney TX 75071


Phone: 888-648-5040
Fax: 214-618-3765
www.goslyn.com






goslyn™ MODEL GOS80 25 GPM Grease Removal Device



Model:	GOS80
Shipping Dimensions	36" X 20" X 22.5 " 91.4 cm X 50.8 cm X 57.2 cm
Shipping Weight	135 lbs. / 61.2 Kg
Required Clearances	<ul style="list-style-type: none"> • Headroom needed above strainer basket: 12" • 2" inlet • 2" outlet • Access to front Oil Cassette • Access to hinged lid for Oil Valve
Approval Agencies:	UL; NSF; IAPMO / UPC; CSA
Electrical Requirements:	110 Volt, 1000 watts, 9 Amps within 5' of unit

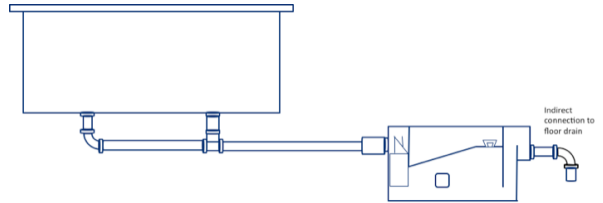

The Goslyn Outlet may **discharge either indirectly** (e.g., into a floor sink, as shown in the above schematic) **or directly** to a drainpipe.

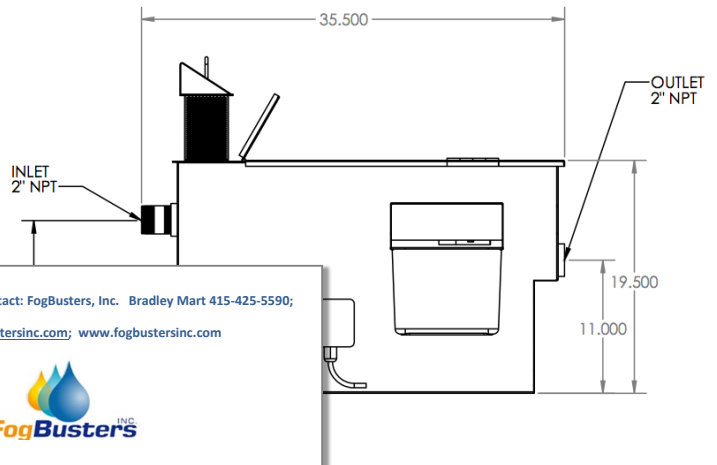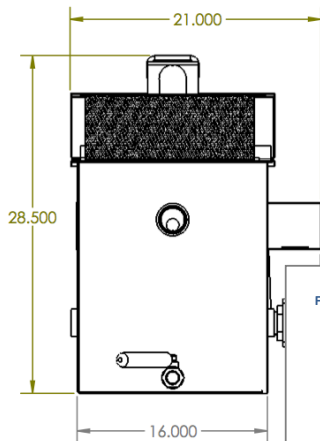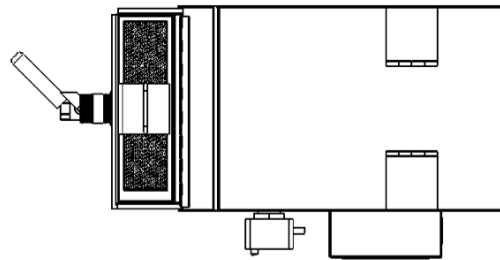

For Sales/Service please contact: FogBusters, Inc. Bradley Mart 415-425-5590;
bradley@fogbustersinc.com; www.fogbustersinc.com

"The easiest & most effective GRD to operate & maintain!"



Goslyn LP
 1904 University Business Dr.
 Suite #310
 McKinney, Texas, U.S.A. 75071

Phone: 888-648-5040
 Fax: 214-618-3765
www.goslyn.com